

519435

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)


PCT

(10) International Publication Number
WO 2004/004409 A1

- (51) International Patent Classification⁷: **H04R 5/04** (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/EP2002/007228
- (22) International Filing Date: 1 July 2002 (01.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espo (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **MARX, Jochen** [DE/DE]; Schwilmengasse 5, 89073 Ulm (DE). **GÖGGLMANN, Thomas** [DE/DE]; Kantstrasse 21, 89547 Gerstetten (DE).
- (74) Agent: **VAN WALSTIJN, Gerard, G., B.**; Walstijn Intellectual Property ApS, Parkovsvej 3, DK-2820 Gentofte (DK).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report

[Continued on next page]

(54) Title: MOBILE COMMUNICATION TERMINAL

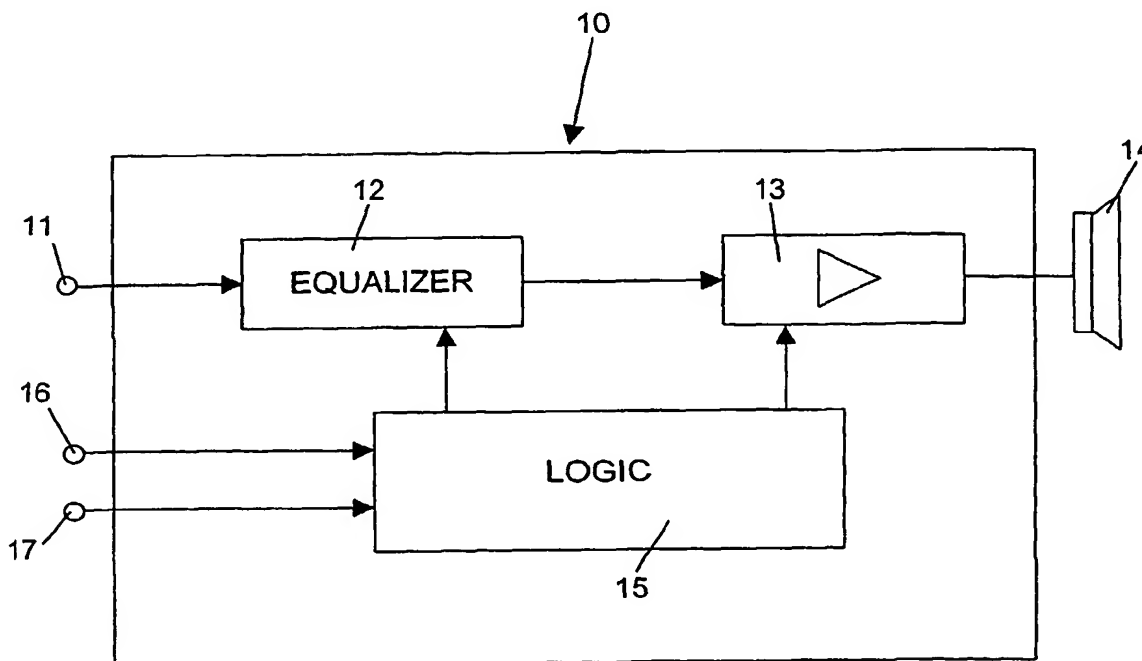

(57) Abstract. The invention relates to controlling the equalizer in a mobile communication terminal, advantageously a mobile phone. According to the invention, the communication terminal comprises means for decreasing the frequency selective attenuation by the equalizer when a maximum amplification by the amplifier has already been reached in order to increase the volume of the sound reproduced by the loudspeaker.

WO 2004/004409 A1

WO 2004/004409 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

MOBILE COMMUNICATION TERMINAL

The present invention relates to mobile communication terminals comprising a loudspeaker with a non-flat frequency response, an amplifier and an equalizer for at least partially compensating the non-flat frequency response of said loudspeaker through frequency selective attenuation. Further, the invention relates to a sound reproduction system for a mobile communication terminal comprising a loudspeaker with a non-flat frequency response, an amplifier and an equalizer for at least partially compensating the non-flat frequency response of said loudspeaker through frequency selective attenuation, and to a method of controlling the volume of the sound produced by an audio system for a mobile communication terminal.

BACKGROUND ART

Mobile communication terminals need to provide a reasonable good audio quality from the in build loudspeaker. Especially, mobile communication terminals provided with e.g. a FM radio, a digital audio player or hands free speaker function, need to provide a good audio quality. Ideally a loudspeaker would make all notes in the frequency range sound as loud as each other. In other words, it would have a flat frequency response. This is practically impossible from a single loudspeaker because of resonance. Mobile communication terminals, such as mobile phones are typically equipped with only one loudspeaker and have a further disadvantage in that the single loudspeaker is not placed in a dedicated loudspeaker cabinet. Instead, the housing of the mobile phone serves amongst many other functions as a loudspeaker cabinet. Another requirement on the audio

system is the ability to produce loud alarms and ringing tones. Obviously, many compromises have to be made in the choice of loudspeaker and in designing the housing. The resulting frequency response is therefore usually not linear. The audio system of some mobile phones is equipped with an equalizer to compensate as far as possible for the loudspeaker characteristic such as to obtain a more linear frequency response, i.e. by dampening out the resonance frequencies, especially in the critical midrange frequencies to which human hearing is most attuned.

EP-A-0 767 570 discloses a mobile communication terminal in which the equalization of a reproduced sound is changed according to the operating conditions of the terminal. Information about the conditions is obtained by monitoring the sound volume set by the user, measuring the background noise in the operating environment of the phone through the phone's microphone and/or monitoring the quality of the connection between the phone and the communication network. The low frequency emphasis is reduced in a very noisy environment and increased in a quiet environment. It is required that the terminal handles sound as a digital-form signal. The terminal includes therefore a loudspeaker for sound reproduction and a digital signal processing means for digital processing of the sound to be reproduced, which digital signal processing means comprises an equalizer with a certain frequency response, means for generating control information describing its operating conditions and a means for changing the frequency response of the equalizer on the basis of the control information.

US-A-5 915 235 discloses a mobile communication terminal comprising an equalizer preprocessor for a mobile telephone speech coder that adapts to the characteristics

of its input transducer. The equalizer determines the frequency response of the input transducer by measuring the long term characteristics of the input signal and estimating the spectral envelope of that signal. The
5 equalizer then adapts so that the output signal has a spectral response closer to a perceptually ideal response in accordance with the calculated spectral envelope.

10 WO-A-9 805 150 discloses a cellular having an audio speaker provided with means for receiving audio signals and means for filtering the audio signals to alter a frequency response pattern thereof. The means for
15 filtering operates in response to user control to allow the user to adjust the frequency response pattern as desired. In this manner, the user may adjust the frequency response to compensate for local noise or transmission problems or for hearing abnormalities to
20 thereby allow the user to hear the other party to a telephone call more clearly.

None of the prior art mobile communication terminals has though provided a satisfactory solution to fulfill both the requirement of an optimum frequency response
25 characteristic and a high obtainable maximum volume.

DISCLOSURE OF THE INVENTION

On this background, it is an object of the present
30 invention to provide a mobile communication terminal of the kind referred to initially, which provides both a good frequency response and a high maximum obtainable volume. This object is achieved in accordance with claim
1 by providing a terminal of said kind that comprises
35 means for decreasing the frequency selective attenuation to increase the volume of the sound reproduced by the

loudspeaker when a maximum amplification by the amplifier has already been reached. Thus, in the situation where further amplification is not possible, which in the prior art solutions meant that no higher volume could be obtained, a further increase in volume is possible by gradually eliminating the frequency selective attenuation by the equalizer. This additional volume is particularly advantageous for loud reproduction speech signals, since the typical loudspeaker frequency response is such that the frequency selective attenuation by the equalizer is highest in the mid-range frequencies that are important for the intelligibility of speech. Thus, reducing the frequency selective attenuation increases the volume in the mid-range frequencies, and the intelligibility of the speech signal reproduced is improved in e.g. loud ambient noise conditions.

The frequency selective attenuation can be decreased by decreasing the attenuation for all frequencies reproduced, or by changing the characteristic of the equalizer.

Advantageously, the means for decreasing the frequency selective attenuation are set to obtain substantially zero attenuation of all frequencies reproduced at a maximum volume setting, so that a minimum loss maximum volume sound can be reproduced.

The mobile communication terminal may further comprise means for adjusting the amplification level of the amplifier that are arranged to maintain the amplification at a maximum level when the volume setting is reduced until the means for decreasing the frequency selective attenuation has increased the attenuation factor to a level at which a substantially linear frequency response of said loudspeaker is obtained.

The mobile communication terminal may comprise means for adjusting the amount of frequency selective attenuation that are arranged to adapt the profile of the frequency response of the loudspeaker system increasingly to the hearing curve of the human ear, preferably as defined in ISO 226:1987, with decreasing volume setting.

It is another object of the present invention to provide a mobile communication terminal of the kind referred to initially, which provides both a good frequency response and a high intelligibility of the sound reproduced. This object is achieved in accordance with claim 8 by providing a terminal of said kind that comprises means for adjusting the frequency selective attenuation to increasingly adapt the frequency response of said loudspeaker to the human hearing curve with decreasing volume setting.

It is yet another object of the present invention to provide a sound reproduction system for a mobile communication terminal comprising a loudspeaker with a non-flat frequency response, an amplifier and an equalizer for at least partially compensating the non-flat frequency response of said loudspeaker through frequency selective attenuation, which provides for an optimized frequency response and obtainable volume for different types of signals to be reproduced. This object is achieved in accordance with claim 11 by providing a sound reproduction system of said kind comprising means for adjusting the frequency response characteristic of the equalizer depending on the type of audio signal reproduced.

The type of audio signals may comprise speech signals, music signals, ringing tones and alarms. Speech signal

may further be divided into speech signals for headset use and speech signals of hands free use (speakerphone).

5 The sound reproduction system may comprise means for automatically adjusting the frequency response of the equalizer when a speech signal is reproduced to obtain a substantially flat frequency response of the loudspeaker to increase intelligibility at higher volume settings.

10 The sound reproduction system may further comprise means for automatically adjusting the frequency response of said equalizer when a speech signal is reproduced to obtain a frequency response of said loudspeaker that substantially corresponds to normal equal-loudness level
15 contours as defined in ISO 226:1987, to improve intelligibility.

The sound reproduction system may also comprise means for automatically adjusting the frequency response of the
20 equalizer when a music signal is reproduced to obtain a low attenuation of the low-frequency part of the sound reproduced, to place more emphasis on the low-frequency part of the music reproduced, which is often advantageous in reproduction of music.

25 The sound reproduction system may also comprise means for automatically adjusting the frequency response of the equalizer when a music signal is reproduced to obtain a high attenuation of mid-frequency part of the sound
30 reproduced, so that more emphasis is placed on the low-frequency and high-frequency part of the music reproduced, which is often advantageous in reproduction of music.

35 The sound reproduction system may also comprise means for automatically adjusting the frequency response of the

equalizer when a ringing signal or an alarm signal is reproduced to a substantially zero attenuation of all frequencies of the sound reproduced, so that ringing tones and alarms can be reproduced as loud as possible.

5

It is another object of the present invention to provide a method of controlling the volume of sound produced by an audio system for a mobile communication terminal of the kind referred to initially. This object is achieved in accordance with claim 18 by providing a method comprising the steps of:

10

-increasing the amplification of the audio signal when input for increasing the volume is received and a maximum amplification has not yet been reached,

15

-decreasing the frequency selective attenuation of the equalizer when input for increasing the volume is received and the maximum amplification has already been reached,

20

-increasing the frequency selective attenuation of the equalizer when input for decreasing the volume is received and the frequency selective attenuation is below the normal level, and

25

-decreasing the amplification of the audio signal when input for decreasing the perceived loudness is received and the attenuation level of the equalizer is on the normal level.

30

Further objects, features, advantages and properties of the mobile communication terminal, sound reproduction system and method according to the invention will become apparent from the detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

35

In the following detailed portion of the present description, the invention will be explained in more

detail with reference to the exemplary embodiments shown in the drawings, in which

Fig. 1 is a graph showing various the frequency responses of a loudspeaker of a mobile phone,

5 Fig. 2 is a block diagram illustration principle of the invention and its application in a mobile phone, and

Fig. 3 is a graph showing the various frequency selective attenuation profiles of the equalizer.

10 DETAILED DESCRIPTION

In the following detailed description, a mobile communication terminal according to the invention in the form of a hand portable phone, preferably a
15 cellular/mobile phone, will be described by the preferred embodiments.

The continuous line 1 in Fig. 1 shows the frequency response of the loudspeaker 14 of the mobile phone, when
20 no equalization is used. The graph clearly shows two resonance peaks, characteristic for a single loudspeaker design.

The mobile phone comprises a digital signal processor, responsible for the digital processing of a speech or
25 music signal in the mobile phone. The digital signal is converted to an analog signal and fed to the analog signal processor 10. Fig. 2 shows a block diagram of the analog signal processor 10. The analog signal is received
30 at terminal 11. The signal passes from the terminal 11 via an equalizer 12 and an amplifier 13 to a loudspeaker 14. Alternatively, the signal processor 10 can be digital and in this case the equalizer 12 is fed with a digital signal, which means that the equalizer 12 includes or is
35 followed by a D/A converter. In the lower part of the figure, a control unit 15, the main task of which, is to

control the equalizer 12, so that the signal to be reproduced is frequency selectively attenuated. Another task of the control unit 15 is to control the amplification by amplifier 13. The operation of the control block 15 is based on control parameters which are brought to the control block as input signals. The control block receives a signal identifying the type of audio signal to be reproduced from terminal 16. The type of signals to be reproduced comprise speech signals, speech signals for use with a headset, speech signals for use with a loudspeaker, music signals, ringing tones and alarms. From terminal 17 the control block receives a signal indicating the volume setting. The volume setting could be provided by the user through the user interface, or be provided automatically, i.e. in response to measured or received signals. On the basis of the type of audio signal and the volume setting, the control unit 15 is able to retrieve the desired setting for the frequency selective attenuation of the equalizer 12 and the desired amplifier setting from a look-up table stored in the control unit 15. The frequency selective attenuation of the equalizer 12 is chosen such that the frequency response of the loudspeaker 14 is adapted to the different circumstances at which the mobile phone operates. The frequency selective attenuation of the equalizer can vary in many ways. The different settings are explained with the following examples.

When the control unit 15 receives from terminal 16 a signal that a ringing tone of an alarm is to be reproduced, the frequency response of the loudspeaker 14 is substantially flat, as shown by line 3 in Fig. 1. The frequency selective attenuation of the equalizer 12 for the corresponding setting is shown in Fig. 3 by line 1'. The frequency selective attenuation of the equalizer 12 is set to obtain a substantially flat loudspeaker

response for all volume settings between the lowest volume setting and a high volume setting, at which the amplifier setting is at its maximum. The volume is change takes place through adjustment of the setting of the amplifier 13 only.

For volume settings there above the setting at which the maximum amplification is reached, the frequency selective attenuation of the equalizer 12 is reduced. The setting for the amplifier 13 is maintained at the maximum amplification. The interrupted line 2 in Fig. 1 shows the corresponding frequency response of the loudspeaker 14. The frequency selective attenuation of the equalizer for the corresponding setting is shown in Fig. 3 by line 2'. For volume settings between the setting at which the maximum amplification setting for the amplifier 13 is reached and the absolute maximum volume setting, the frequency selective attenuation of the equalizer 12 is gradually reduced from the setting as shown by line 3' via the setting as shown by line 2' to the setting as shown by line 1' at which no frequency selective attenuation of the equalizer 12 takes place (zero attenuation).

When the control unit 15 receives from terminal 16 a signal that a speech signal is to be reproduced, the frequency response of the loudspeaker 14 is substantially flat, as shown by line 3 in Fig. 1, for a high volume setting only. The frequency selective attenuation of the equalizer 12 for the high volume setting is shown in Fig. 3 by line 3'. The human hearing response is not equally sensitive to all frequencies, particularly in the low and high frequency ranges. For lower volume settings the response of the loudspeaker 14 is therefore adjusted to the hearing curve of the human ear, preferably in an increasing manner in response to decreasing volume

settings, and the volume is adjusted by adjusting the amplification. The loudspeaker response is preferably adjusted to the hearing curve as described by the equal loudness contours as defined in ISO recommendation 226:1987. The corresponding frequency responses of the loudspeaker are illustrated by lines 4 and 5 in Fig. 1. The frequency selective attenuation of the equalizer for the corresponding settings is shown in Fig. 3 by line 4' and 5'. For volume settings above the setting at which the maximum amplification is reached, the frequency selective attenuation of the equalizer 12 is reduced as explained above.

When the control unit 15 receives from terminal 16 a signal that a music signal is to be reproduced, the frequency response of the loudspeaker 12 is adapted to emphasize the low-frequency part of the sound to be reproduced, and preferably also the high frequency part of the sound to be reproduced, as illustrated by line 6 in Fig. 1. The frequency selective attenuation of the equalizer 12 for the corresponding setting is shown in Fig. 3 by line 6'. This setting allows improved reproduction of music signals, where for which a dominant mid-range response is advantageous.

Although the present invention has been described in detail for purpose of illustration, it is understood that such detail is solely for that purpose, and variations can be made therein by those skilled in the art without departing from the scope of the invention.

Thus, while the preferred embodiments of the devices and methods have been described in reference to the environment in which they were developed, they are merely illustrative of the principles of the inventions. Other

embodiments and configurations may be devised without departing from the scope of the appended claims.

CLAIMS:

1. A mobile communication terminal comprising a
loudspeaker with a non-flat frequency response, an
5 amplifier and an equalizer for at least partially
compensating the non-flat frequency response of said
loudspeaker through frequency selective attenuation,
characterized by comprising means for decreasing said
frequency selective attenuation to increase the volume of
10 the sound reproduced by said loudspeaker when a maximum
amplification by said amplifier has already been reached.
2. A mobile communication terminal according to claim 1,
characterized in that said frequency selective
15 attenuation is decreased by decreasing the attenuation
for all frequencies reproduced.
3. A mobile communication terminal according to claim 1
or 2, characterized in that said frequency selective
20 attenuation is decreased by changing the characteristic
of said equalizer.
4. A mobile communication terminal according to claim 2
or 3, characterized in that said means for decreasing
25 said frequency selective attenuation are arranged to
gradually decrease said frequency selective attenuation
with increasing volume setting.
5. A mobile communication terminal according to claim 4,
30 characterized in that said means for decreasing said
frequency selective attenuation are set to obtain
substantially zero attenuation of all frequencies
reproduced at a maximum volume setting.
- 35 6. A mobile communication terminal according to claim 4
or 5, characterized by comprising means for adjusting the

amplification level of said means for amplifying, said means for adjusting the amplification level being arranged to maintain the amplification at a maximum level when said volume setting is reduced until said means for
5 decreasing said frequency selective attenuation has increased the attenuation factor to a level at which a substantially linear frequency response of said loudspeaker is obtained.

10 7. A mobile communication terminal according to any of claims 3 to 6, characterized in that said means for adjusting the amount of said frequency selective attenuation are arranged to adapt the profile of the frequency response of the loudspeaker system increasingly
15 to the hearing curve of the human ear, preferably as defined in ISO 226:1987, with decreasing volume setting.

8. A mobile communication terminal comprising a loudspeaker with a non-flat frequency response, an
20 amplifier and an equalizer for at least partially compensating the non-flat frequency response of said loudspeaker through frequency selective attenuation, characterized in that said audio system comprises means for adjusting said frequency selective attenuation to
25 increasingly adapt the frequency response of said loudspeaker to the human hearing curve with decreasing volume setting.

9. A mobile communication terminal according to claim 8,
30 characterized in that said means for adjusting said frequency selective attenuation increasingly adapt the frequency response of said loudspeaker to normal equal-loudness level contours as defined in ISO 226:1987 with decreasing volume setting.

10. A mobile communication terminal according to claim 8 or 9, characterized by comprising means for decreasing said frequency selective attenuation to increase the volume of the sound reproduced by said loudspeaker when a maximum amplification by said amplifier has already been reached.

11. A sound reproduction system for a mobile communication terminal comprising a loudspeaker with a non-flat frequency response, an amplifier and an equalizer for at least partially compensating the non-flat frequency response of said loudspeaker through frequency selective attenuation, characterized in that said audio system comprises means for adjusting the frequency response characteristic of said equalizer depending on the type of audio signal reproduced.

12. A sound reproduction system according to claim 11, characterized in that said type of audio signals comprise speech signals, speech signals for use with a headset, speech signals for use with a loudspeaker, music signals, ringing tones and alarms.

13. A sound reproduction system according to claim 11, characterized by comprising means for automatically adjusting the frequency response of said equalizer when a speech signal is reproduced to obtain a substantially flat frequency response of said loudspeaker.

14. A sound reproduction system according to claim 11, characterized by comprising means for automatically adjusting the frequency response of said equalizer when a speech signal is reproduced to obtain a frequency response of said loudspeaker that substantially corresponds to normal equal-loudness level contours as defined in ISO 226:1987.

15. A sound reproduction system according to claim 11,
characterized by comprising means for automatically
adjusting the frequency response of said equalizer when a
5 music signal is reproduced to obtain a low attenuation of
the low-frequency part of the sound reproduced.

16. A sound reproduction system according to claim 11,
characterized by comprising means for automatically
10 adjusting the frequency response of said equalizer when a
music signal is reproduced to obtain a high attenuation
of mid-frequency part of the sound reproduced.

17. A sound reproduction system according to claim 11,
15 characterized by comprising means for automatically
adjusting the frequency response of said equalizer when a
ringing signal or an alarm signal is reproduced to a
substantially zero attenuation of all frequencies of the
sound reproduced.

20

18. A method of controlling the volume of sound produced
by an audio system for a mobile communication terminal,
said audio system comprising a loudspeaker with a non-
flat frequency response, means for amplifying an audio
25 signal, an equalizer for at least partially compensating
the non-flat frequency response of said loudspeaker by
frequency selective attenuation and input means allowing
user input for increasing or decreasing the volume,
comprising the steps of:

30 -increasing the amplification of said audio signal when
input for increasing the volume is received and a maximum
amplification has not yet been reached,
-decreasing the frequency selective attenuation of said
equalizer when input for increasing the volume is
35 received and the maximum amplification has already been
reached,

-increasing the frequency selective attenuation of said equalizer when input for decreasing the volume is received and the frequency selective attenuation is below said normal level, and

- 5 -decreasing the amplification of said audio signal when input for decreasing the perceived loudness is received and the attenuation level of said equalizer is on said normal level.

10

15

20

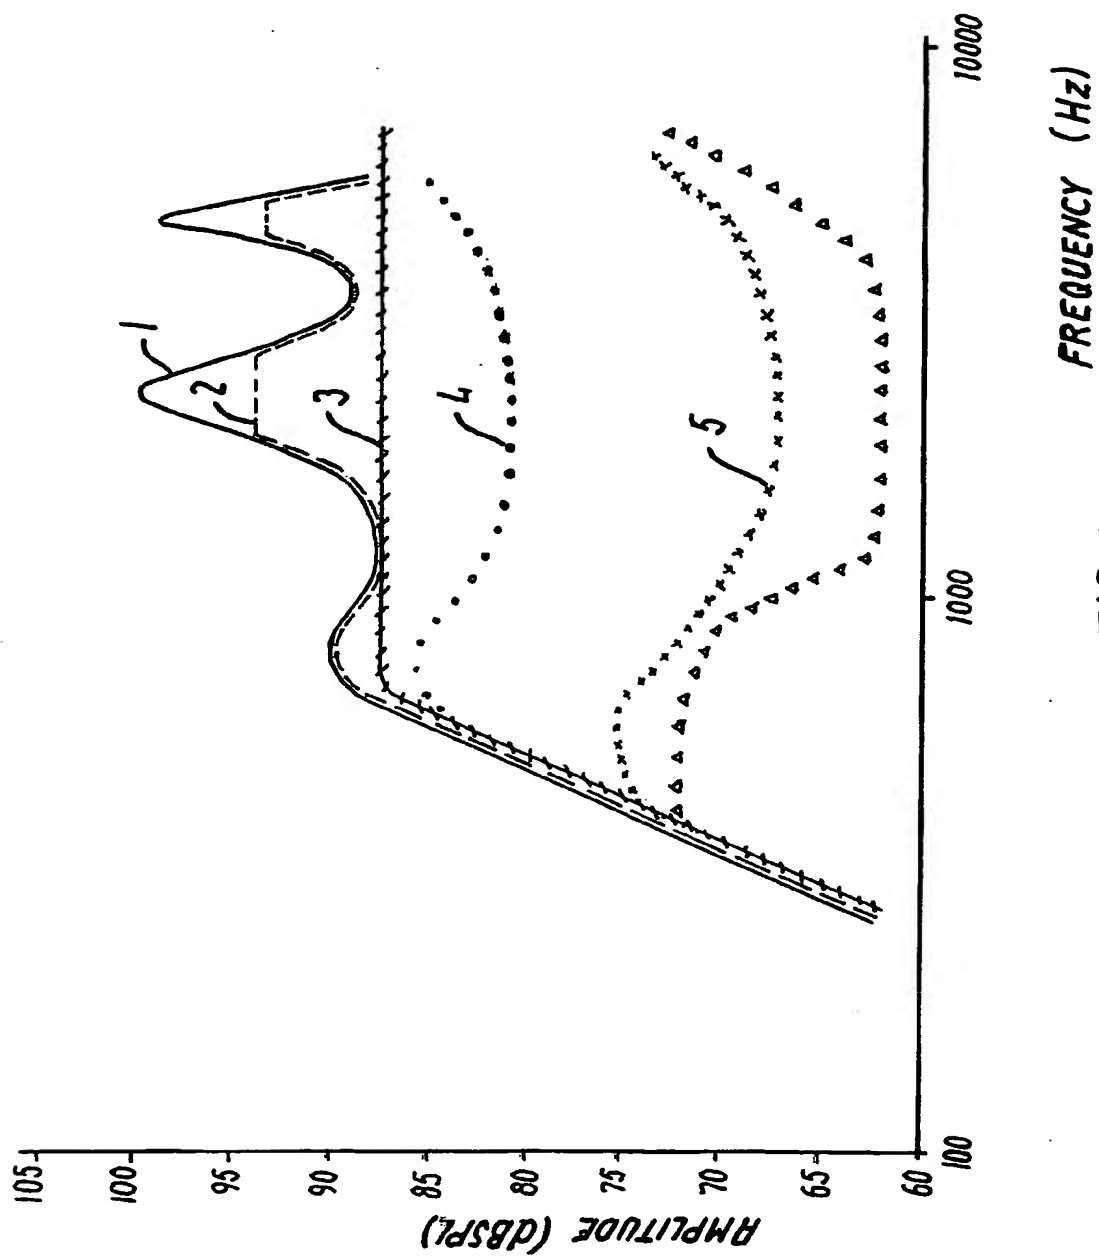


FIG. 1

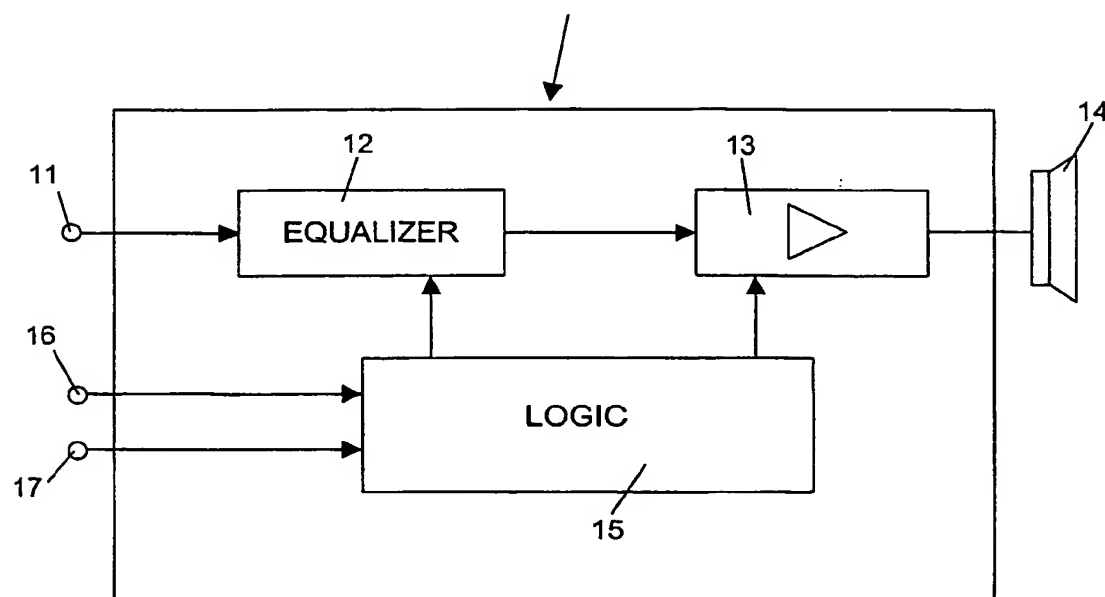


Fig. 2

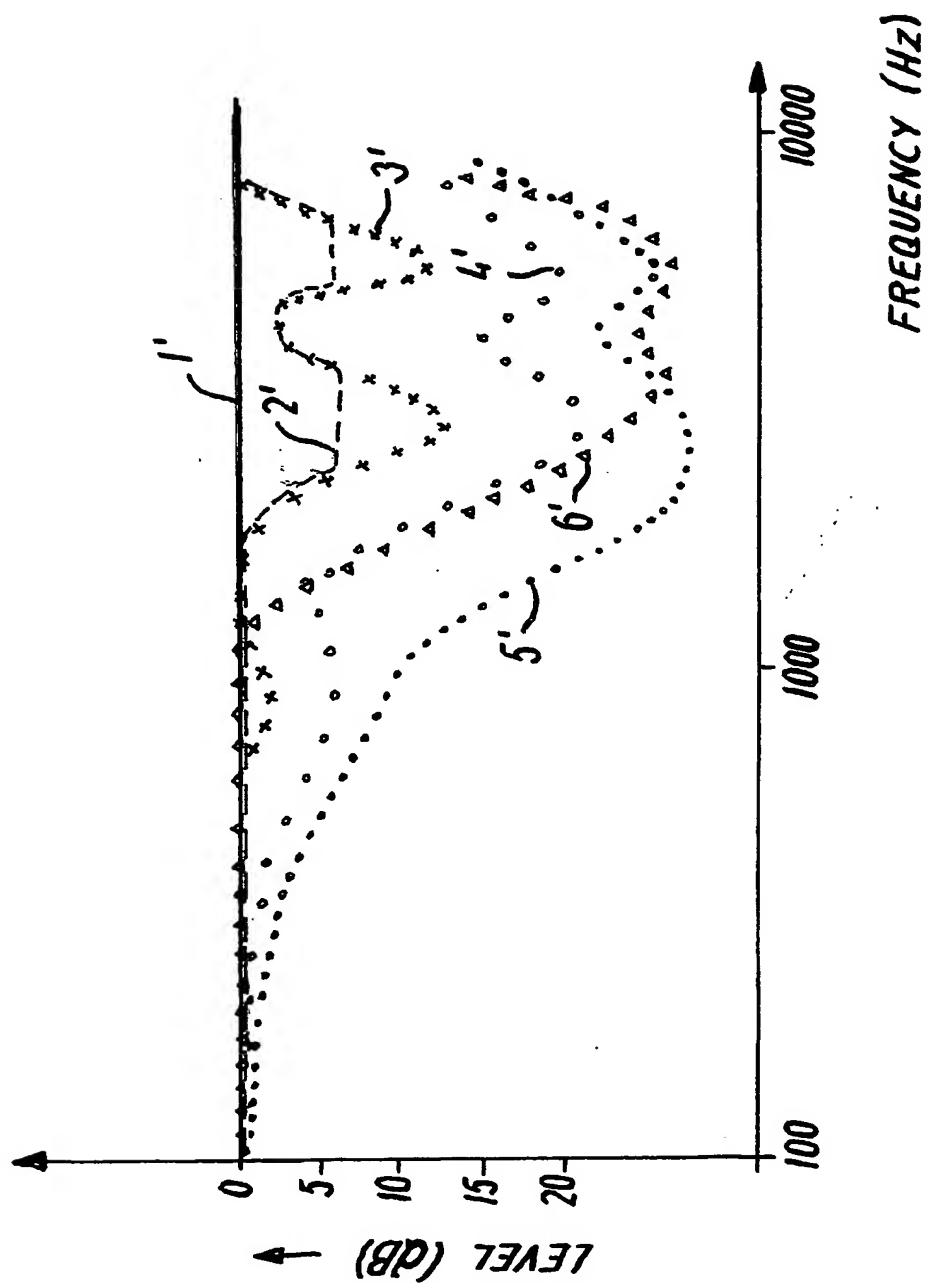


FIG.3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/07228

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04R5/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04R H04M H03G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 574 792 A (KONNO FUMIYASU) 12 November 1996 (1996-11-12) the whole document ---	1-18
A	US 4 721 923 A (STANGEL JAMES H ET AL) 26 January 1988 (1988-01-26) column 2, line 45 -column 5, line 10; figure 4 ---	1-18
A	EP 0 767 570 A (NOKIA MOBILE PHONES LTD) 9 April 1997 (1997-04-09) cited in the application the whole document ---	1-18
-/--		



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

11 July 2003

Date of mailing of the international search report

21/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fülöp, I

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/07228

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 013, no. 344 (E-797), 3 August 1989 (1989-08-03) & JP 01 103053 A (FUJITSU LTD), 20 April 1989 (1989-04-20) abstract ---	1,8,11, 18
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 064 (E-1167), 18 February 1992 (1992-02-18) & JP 03 259607 A (SADAO FUJITA), 19 November 1991 (1991-11-19) abstract -----	1,8,11, 18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/07228

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5574792	A	12-11-1996	JP 3097407 B2 JP 7059187 A	10-10-2000 03-03-1995
US 4721923	A	26-01-1988	AT 96951 T DE 3788070 D1 DE 3788070 T2 EP 0348396 A1 JP 5082084 B JP 2500077 T KR 9605377 B1 WO 8805226 A1	15-11-1993 09-12-1993 03-03-1994 03-01-1990 17-11-1993 11-01-1990 24-04-1996 14-07-1988
EP 0767570	A	09-04-1997	FI 954737 A EP 0767570 A2 JP 9135194 A US 6011853 A	06-04-1997 09-04-1997 20-05-1997 04-01-2000
JP 01103053	A	20-04-1989	NONE	
JP 03259607	A	19-11-1991	NONE	